



FIRE SEALS




Our intumescent fire door seals offer the ultimate in fire protection where no smoke sealing is required - or with an additional smoke + acoustic seal such as Batwing®. Fire seals can be fitted separately if preferred. The seal also includes integral antimicrobial protection.




LP1004 Fire seal




LP1504 Fire seal



LP2004 Fire seal



LP2504 Fire seal

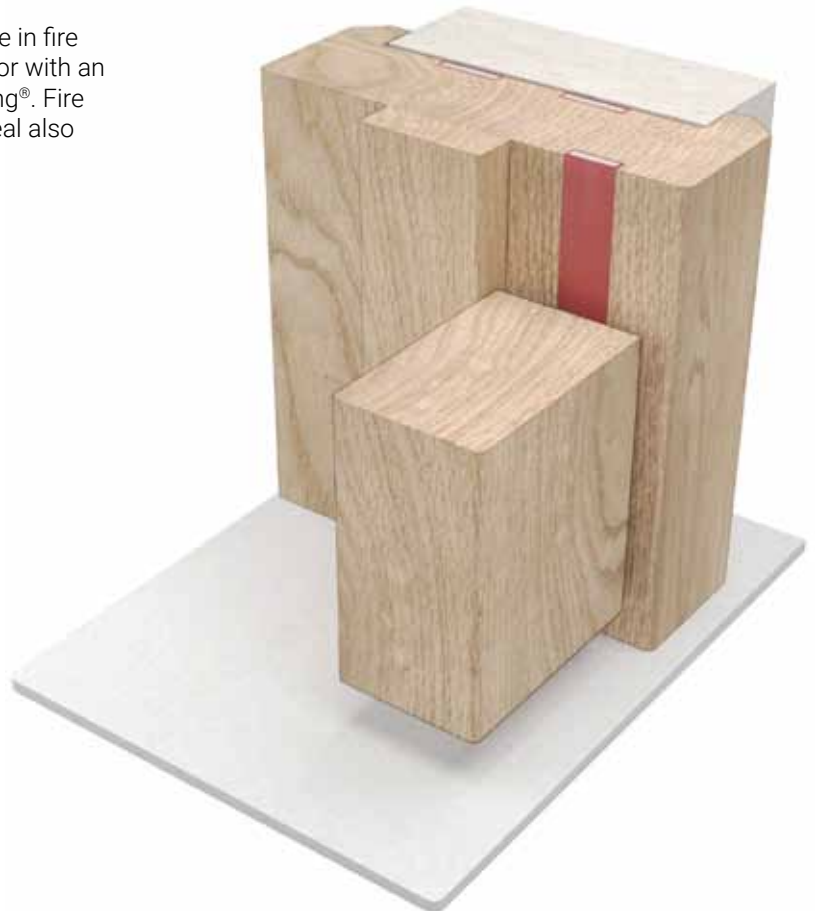

SYSTEM SPECIFICATIONS

Size

10 x 4mm

15 x 4mm

20 x 4mm

25 x 4mm

Other sizes available, please ask for details.

Location

Single + double leaf doors.

Seal material

PVC encased sodium silicate.

Standard lengths

1m and 2.1m.

Other lengths to special order.

Min / Max gap size

3mm / 4mm

Fixing

Heavy duty self-adhesive backing tape.

Key feature

A choice of sizes to cover 30 and 60 minute applications.

Finishes

Available in a range of standard colours, plus woodgrain and metallic finishes for superior aesthetics.

Performance

Fire: BS EN 1634-1:2008

Fire: BS 476: Pt.22: 1987

Durability: 1 million cycles

CERTIFIRE: CF330 & CF341

BBA: 92/2841

IFC: FRPP 454-2